


GA30/GA20/GA15

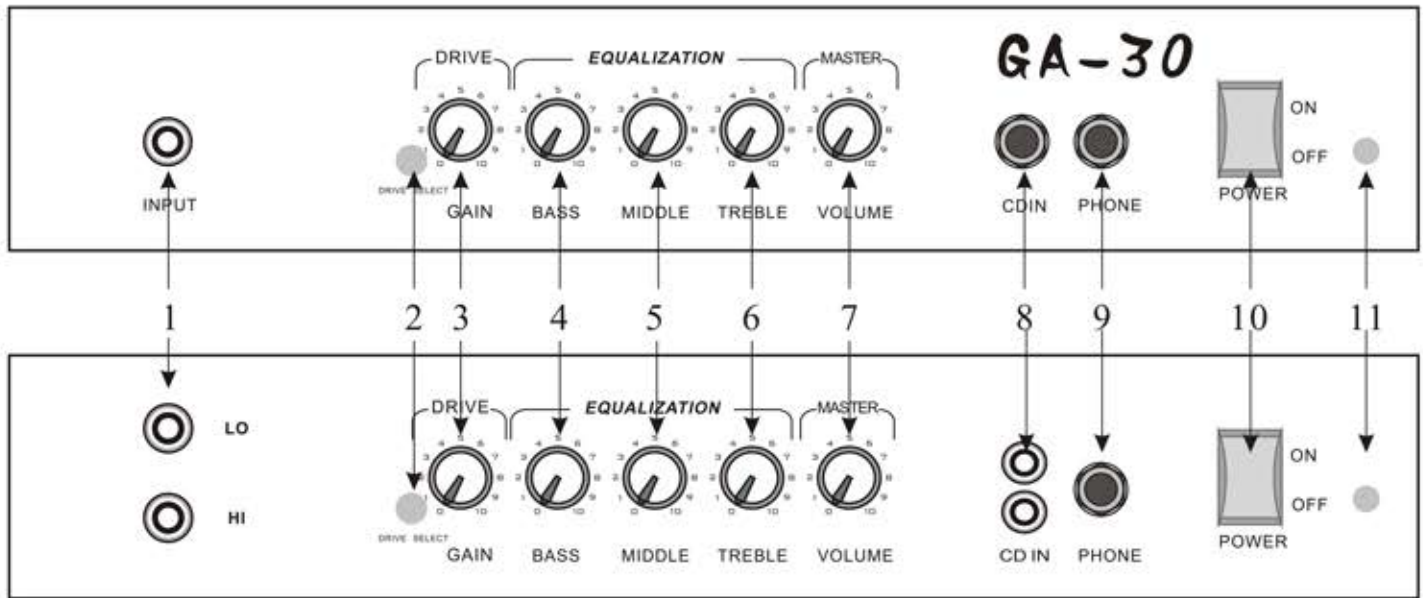

1、Input

Socket provided for connecting electric guitar.

2、Drive Select Switch

Engages the overdrive channel.

3、Gain

Sets the level of distortion. Within the overdrive channel.

4、Bass

Controls the low frequency EQ in the preamplifier.

5、Middle

Controls the mid frequency EQ in the preamplifier.

6、Treble

Controls the high frequency EQ in the preamplifier.

7、Volume

Controls the overall listening level of the amplifier.

8、CD IN

Socket for connection of external CD player.

9、Phone

Socket for connecting external headphones.

Connecting headphones automatically isolates the internal speaker.

10、Power switch

Turns your amplifier on and off.

11、Power LED

The LED will be lit when your amplifier is on.

TECHNICAL SPECIFICATION

Power output:	GA30 30W GA20 20W GA15 15W
Power Supply:	230V AC 50HZ/110V AC 60HZ
Dimensions(H×W×D):	GA30 320×380×200 GA20 300×340×180 GA15 180×210×110
System Hum and Noise:	≥70dB
Input impedance:	>1M Ω
Speakers impedance:	GA30 40hms (8" speaker) GA20 40hms (6.5" speaker) GA15 40hms (6.5" speaker)