


DSP-20

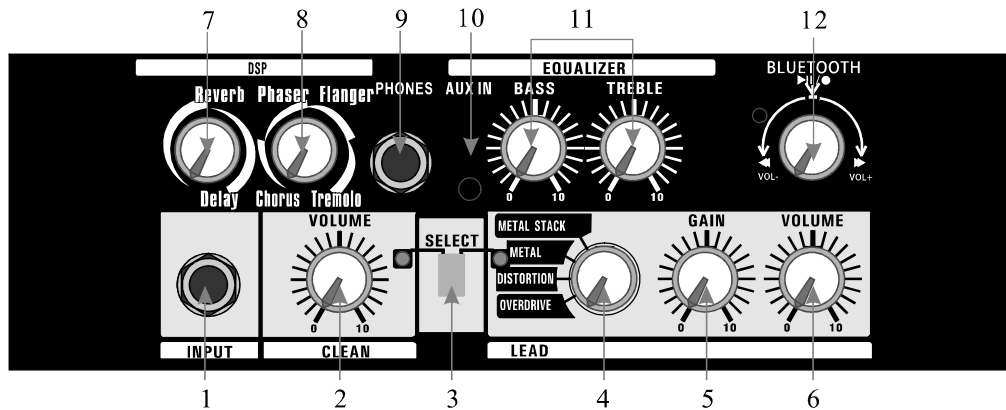

1、Input

Socket provided for connecting electric guitar.

2、Volume

This control sets the volume level for the Clean channel.

3、Drive Select Switch

Engages the overdrive channel.

4、LEAD Channel

You can select from the following four types:
OVERDRIVE、DISTORTION、METAL、
METAL STACK

5、Gain

The Gain control sets the input level of the lead channel.
Adjusting this control fully clockwise will result in maximum gain. This control is often used to adjust the amount of distortion present in the Lead channel.

6、Volume

Use this control to set the overall level of the Lead channel.

7. Rev/Delay Knob

Turn this knob to Rev or Delay to switch to that effect
You can adjust the amount of effect by turning the knob to the desired position.

8. Chorus Phaser Flanger Tremolo Knob

Turn this knob adjust the amount of this 4 effects

9. Recording Out / Phone

Socket for Connecting external headphones.
Connecting headphones automatically isolates the internal speaker.

10. AUX IN

Sockets for connection of external CD player.

11、Lead EQ

The EQ adjust Bass and Treble bands

12. Bluetooth

Mode touch: Play/Pause
Mode hold on: on/Off Bluetooth
Right touch: Next song
Right hold on: Volume increase
Left touch: Last song
Left hold on: Volume decrease

TECHNICAL SPECIFICATION

Power output :	20W
Power Supply :	230VAC 50HZ/110VAC 60HZ
Dimensions(H×W×D) :	270×240×160(mm)
System Hum and Noise :	≥70dB
Input impedance :	>1MΩ
Speakers impedance :	4ohms (8" speaker)

1、輸入插孔(INPUT)

用于連接吉它。

2、正常音量調節(CLEAN VOLUME)

用于調節正常通道整體音量。

3、失真效果開關(DRIVE SELECT)

用于選擇失真通道及正常通道。

4、失真類型選擇 (LEAD CHANNEL)

有以下四種失真類型供選擇
過載、失真、金屬、重金屬

5、增益調節(GAIN)

用于調節失真通道的前置放大，
與DRIVE VOLUME配合使用。

6、失真音量調節(DRIVE VOLUME)

用于調節失真通道的整體音量。

7. 合唱相位弗朗哥颤音效果控制

用于调节以上四种效果

8. 混响延时效果控制

可以改变混响延时效果的回授和时间

9、耳機輸出插口(Recording Out/PHONE)

用于連接耳機，這時機內揚聲器連接會斷開。

10、CD輸入插孔(AUX IN)

用于連接CD機以及用來內錄直播

11、低音、高音調節

用于調節低音區、高音區的提升/衰減量。

12. 蓝牙模式 (BLUETOOTH)

MODE键单击：开始/暂停音乐播放

MODE键长按：打开/关闭蓝牙功能

右边扭到底一下：切换到下一首歌曲

右边扭到底不放：音量增加

左边扭到底一下：切换到上一首歌曲

左边扭到底不放：音量减少

主要技術指標:

輸出功率:	20W
電源:	AC220V 50HZ/AC110V 60HZ
外型尺寸(HXWXD):	270×240×160(mm)
信噪比:	≥70dB
輸入阻抗:	>1MΩ
揚聲器阻抗:	4Ω(8" speaker)

LED:

CHARGE: 充电时显示红色，充满电显示绿色

LOW: 电池电压低时点亮，表示需要充电。

POWER: 亮灯表示功放已开机



Charge: When charge it show red colour, it will show glue colour when charge finish.

Low: When the battery voltage low it will lights up, show the amp need charge.

Power: Lights up when the amp is on.