


A60R

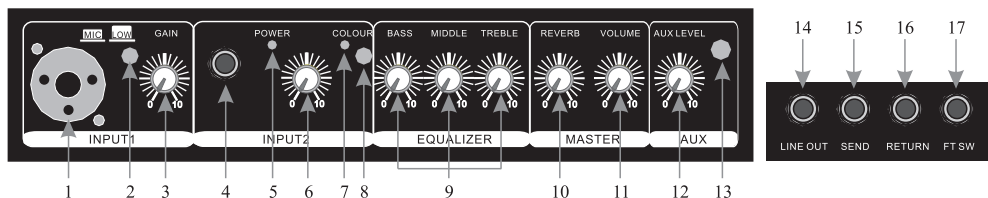

1.Input1: Input for guitar and microphone.

2.Line / Mic switch:

Line: for high gain pickup guitar

Mic: for microphone

3.Gain: Sets the input level

4.Input2: input for guitar

5.Power(LED): Show the power on and off

6.Gain: sets the input level

7.Clip: show overdrive

8.Color: shift the midrange frequency

9.Equalizer: control the high middle and bass frequency

10.Reverb: Adjust the reverb level

11.Volume: Control the master volume

12.Aux level: Adjust the volume level of AUX channel

13.Aux in: Sockets for connection of external CD player

14.Line-out : Sockets for connection to a P.A. system

15.Send: connects to an external effects at this output jack

16.Return: connects to an remote footswitch for reverb on / off

17.Footswitch: connects to an external effects at this input jack

TECHNICAL SPECIFICATION

Power Output:	60W
Power Requirements:	AC220V/50HZ
Dimensions (H×W×D):	280×350×220(mm)
System Hum and Noise:	≥70dB
Input impedance:	>1MΩ
Speaker impedance:	8ohms (8")

1.Input1 (輸入) : 適合于話筒或者吉他的插孔

2.Line / Mic (輸入模式轉換開關) :

Line: 低信號輸入, 適用於高增益拾音器

Mic: 麥克風音源輸入狀態

3.Gain (增益) : 輸入增益控制

4.Input2 (輸入) : 適合于吉他的插孔

5.POWER(電源燈): 顯示電源開關。

6.Gain (增益) : 輸入增益控制

7.Clip: 過載指示器

8.Color: 中音濾波器

9.Equalizer (均衡控制) : 調節高中低音

10.REVERB(混響): 混響量調節

11.VOLUME: 總音量

12.AUX LEVEL: 外接伴奏音量

13.AUX IN: 外接伴奏接口

14.Line-out : 綫性輸出

15.Send: 外接效果器輸出

16.Return : 外接效果器輸入

17.Footswitch : 腳踏開關, 用以控制效果器

主要技術指標:

輸出功率:	60W
電源:	AC220V50HZ/AC110V60HZ
外型尺寸(H×W×D):	280×350×220(mm)
信噪比:	≥70dB
輸入阻抗:	>1MΩ
揚聲器阻抗:	8ohms(8")